


PRODUCT CERTIFICATE

SAB 106R+/750

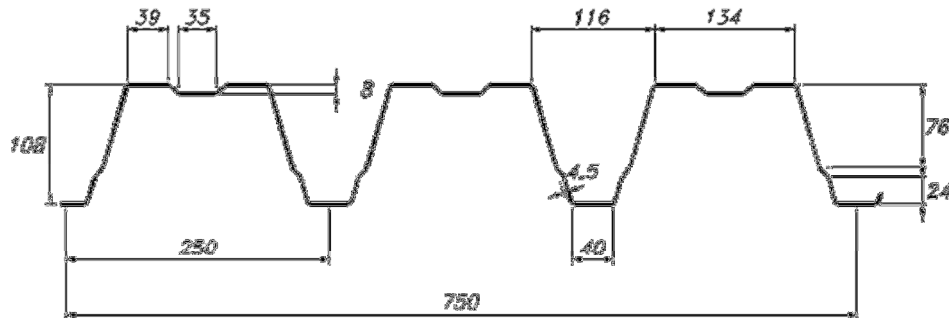

Gauge	Weight
0,75 mm	9,81 kg/m ²
0,88 mm	11,51 kg/m ²
1,00 mm	13,08 kg/m ²
1,13 mm	14,78 kg/m ²
1,25 mm	16,35 kg/m ²
1,50 mm	19,63 kg/m ²

STEEL GRADE

S-320 GD+Z / ZM / ZA / AZ

QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1.

SPANS

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information

STANDARDS

Production according ISO 9001, ISO 14001 and BES 6001

CE-marking and Declaration of Performance according EN 1090

Tolerances according EPAQ Quality Regulations for Profiles

Steel grade according EN 10346

Organic coating according EN 10169

IJsselstein, March 2018