


## PRODUCT CERTIFICATE

### SAB 153R/840

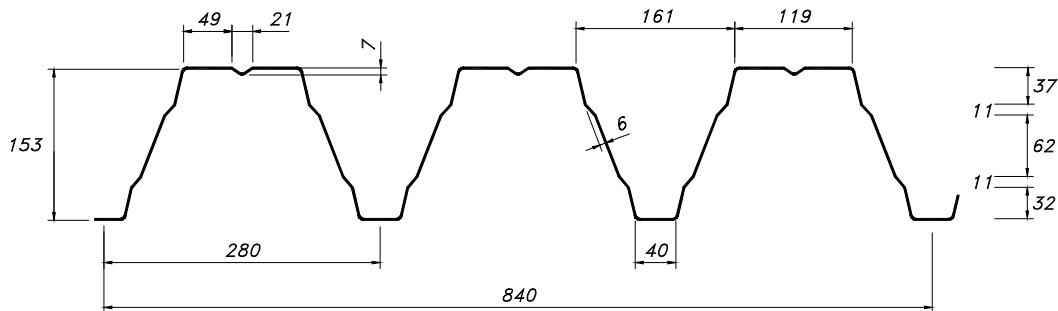

Gauge	Weight
0,75 mm	10,51 kg/m <sup>2</sup>
0,88 mm	12,34 kg/m <sup>2</sup>
1,00 mm	14,02 kg/m <sup>2</sup>
1,13 mm	15,84 kg/m <sup>2</sup>
1,25 mm	17,52 kg/m <sup>2</sup>
1,50 mm	21,03 kg/m <sup>2</sup>

#### STEEL GRADE

S-320 GD+Z / ZM / ZA / AZ

#### QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

#### REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1.

#### SPANS

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information

#### STANDARDS

Production according ISO 9001, ISO 14001 and BES 6001

CE-marking and Declaration of Performance according EN 1090

Tolerances according EPAQ Quality Regulations for Profiles

Steel grade according EN 10346

Organic coating according EN 10169

IJsselstein, March 2018