


## PRODUCT CERTIFICATE

### SAB 30KD/1050-S

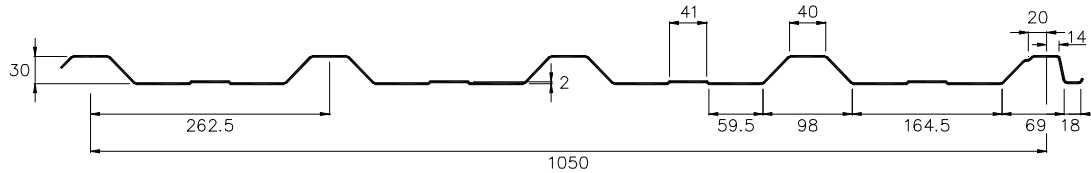

Gauge	Weight
0,63 mm	5,89 kg/m <sup>2</sup>
0,75 mm	7,01 kg/m <sup>2</sup>
0,88 mm	8,22 kg/m <sup>2</sup>
1,00 mm	9,35 kg/m <sup>2</sup>

#### STEEL GRADE

S-320 GD+Z / ZM / ZA / AZ

#### SUSTAINABILITY

Environmentally relevant product information (MRPI and EPD) are published on [www.sabprofiel.com](http://www.sabprofiel.com).

#### QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

#### REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1.

#### SPANS

Depend on wind loads, deflection limitations and safety factors.  
See our SAB-brochure for more information

#### STANDARDS

Production according ISO 9001, ISO 14001 and BES 6001  
CE-marking and Declaration of Performance according EN 14782  
Tolerances according EPAQ Quality Regulations for Profiles  
Steel grade according EN 10346  
Organic coating according EN 10169

IJsselstein, March 2018