


## PRODUCT CERTIFICATE

### SAB 45/900

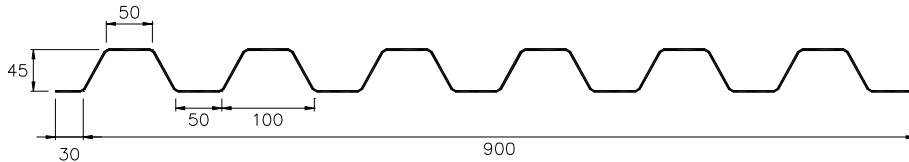

| Gauge   | Weight                  |
|---------|-------------------------|
| 0,63 mm | 6,87 kg/m <sup>2</sup>  |
| 0,75 mm | 8,18 kg/m <sup>2</sup>  |
| 0,88 mm | 9,59 kg/m <sup>2</sup>  |
| 1,00 mm | 10,90 kg/m <sup>2</sup> |

#### STEEL GRADE

S-320 GD+Z / ZM / ZA / AZ

#### SUSTAINABILITY

Environmentally relevant product information (MRPI and EPD) are published on [www.sabprofiel.com](http://www.sabprofiel.com).

#### QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

#### REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1.

#### SPANS

Depend on wind loads, deflection limitations and safety factors.  
See our SAB-brochure for more information

#### STANDARDS

Production according ISO 9001, ISO 14001 and BES 6001  
CE-marking and Declaration of Performance according EN 14782  
Tolerances according EPAQ Quality Regulations for Profiles  
Steel grade according EN 10346  
Organic coating according EN 10169

IJsselstein, March 2018